

SC SX internal Shutter Adapter -----IEC Standard



Features:

- **Internal shutter and Dust Proof(GR326 & IEC61300)**

You do not need to spend time to take away all the caps again when plugging.


- **Eye-safety :**

Protect eyes by blocking laser light.

- **IEC Dimensions:**

It is easy to improve your system with this new adaptor without any change of the racks.

- **Dimention**

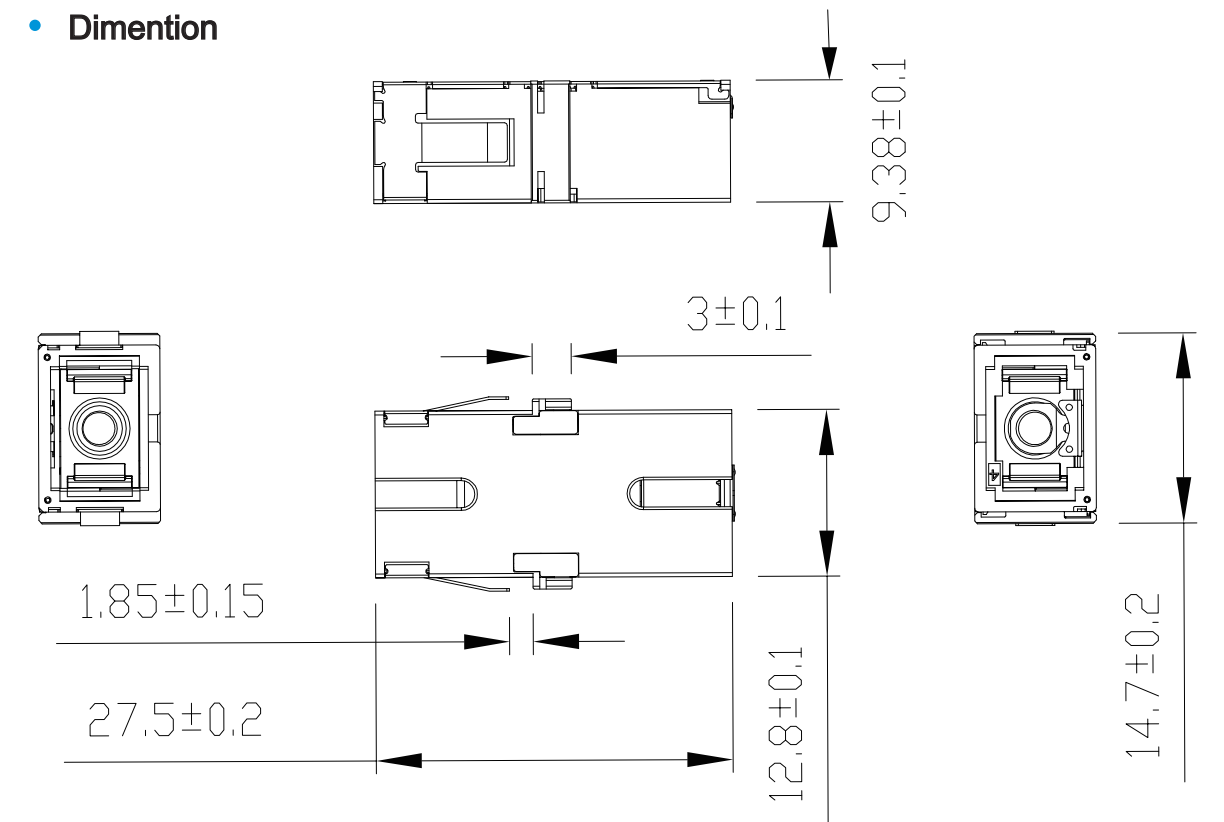

Key Specifications

Insertion Loss	≤0.2dB
Operatin Temperature	-40℃ to+85℃
Storage Temperature	-40℃ to+85℃
Size	IEC61754-20
Durability,500 cycles	IEC61300-2-2
Strength Of Coupling Mechanism, 40N, 5N/s, 120s	IEC61300-2-6
Damp Heat test, +25℃ to +55℃, >90%RH, 6 cycles	IEC61300-2-46
Thermal Change Test , +75℃ to -40℃, 1h At Extreme Temperature, 1℃/min, 12 Cycles	IEC61300-2-22
Dust test	GR326_4.4.4.1 & IEC 61300-2-27
Material	RoHS &REACH Compliant